



Joining technology

Fast and process reliable bonding of fasteners

Designs

Plastic-metal versions

ONSERT® studs



ONSERT® inserts



Plastic versions

ONSERT® cable management



ONSERT® specials



Materials

Plastic moulding

■ PA PACM 12

■ PA PACM 12

Metal part*

■ Steel with zinc-nickel coating, sizes M5 and M6

■ Alloy A286 (passivated, 0.1900-32)

■ Alloy EN AW-6061-T6 with X5CrNi18-10HC (1.4301, 0.1900-32)

Plastic

■ PA PACM 12

Bottom part

■ PA PACM 12

Upper part*

■ PEI

■ PA

■ PA PACM 12

Manual bonding process



Application of the adhesive to the ONSERT® fastener



Insertion of the ONSERT® fastener into the tool holder



Placing the tool on the substrate



Tool removal and assembly

Adhesive

- One-component acrylate (modified)
- Compliant with RoHS Directive 2017/2102/EU
- Fast curing — full strength within seconds
- Compliant with FAR 25 and ANSI/UL 94

Advantages

- Fast curing and immediate strength
- No visual impact on sensitive surfaces
- Applicable if thermal processes cannot be used
- One-component adhesive — no mixing of adhesives
- Manual and automated processing systems available

Limitations

- Permanent ambient temperature < 90 °C
- For metals: AL, steel after e-coating or painting
- For plastics: epoxy-based composites, PC, PA
- For glass: with or without paint


* Others on request

Parameters

Product type	ONSERT® cable holder
Item code	4840 910 0002
Plastic moulding	PA PACM 12
Metal part	–
Surface	–
Adhesive	4839 100 4150
Amount	0.25 g
Tooling	Portable Mini, 8 sec., 90%
Substrate	honeycomb
Surface	cleaned
Thickness	10 mm



Typical type of failure

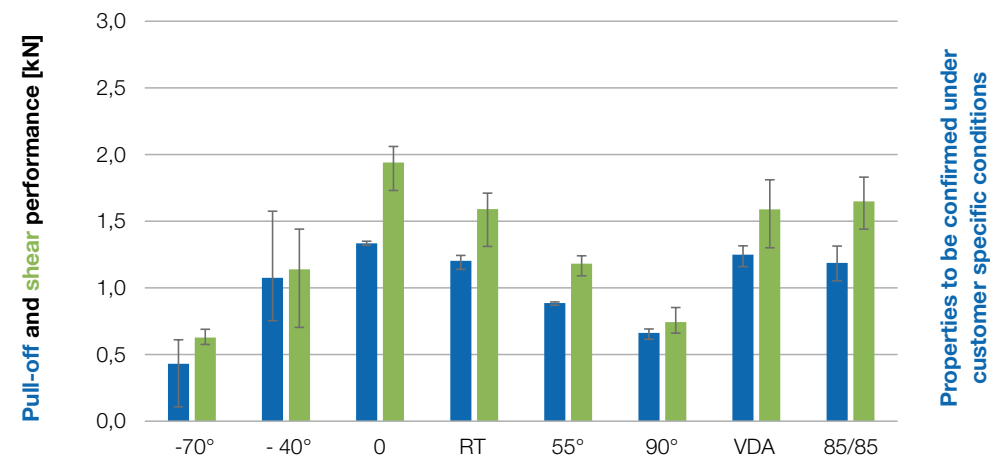


Further characteristics*


Salt spray tests	–
Static load	–
Torque out:	–

- Dynamic test acc. to RTCA-DO 160F Ch. 8
- Dynamic test acc. to RTCA-DO 160F Ch. 7
- Nose wheel imbalance tests acc. to ABD 0100.1.2
- Fluid susceptibility acc. to DO 160 G Sec. 11.4 (materials)
- Flammability in acc. FAR 25-60 sec. vert. (materials)

Load case



Pull-off



Shear



Permanent load

* Not all characteristics apply to all combinations available